


# Data sheet

## BenQ PD2700Q

68.58 cm / 27" LED Display

- WQHD – 2560 x 1440 / 16:9
- 100% Rec.709 / 100 % sRGB
- Panel viewing angle H/V 178°/178°
- Static Contrast 1000:1
- Hight adjustment 130 mm + Pivot

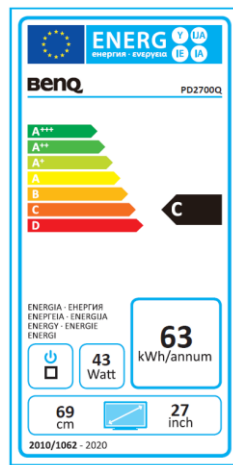

	Model : PD2700Q Art. No. / EAN Code : 9H.LF7LA.TBE / 471 8755 06607 8 Typ : 68.58 cm / 27" Wide TFT, IPS-Panel Technology
<b>Panel</b>	Native resolution : 2560 x 1440 WQHD / 16:9 Pixel pitch : 0.2331 mm Picture diagonale / -area (W x H) : 685,4 mm / 596.7 mm x 335.6 mm Max. Colors : 1.07 Billion Viewing angle H / V (CR>=10) : 178°/ 178° Contrast (static) : 1000:1 Brightness : 350 cd/m <sup>2</sup> Response time : 4 ms (GtG)
<b>Connections:</b>	DP input : DP / mDP HDMI input : HDMI USB input : USB 2.0 x3 (downstream x2 / upstream x1) Headphone jack : yes
<b>Control</b>	Frequency H/V : 30 - 89 kHz / 50 - 76 Hz Controls : On/Off hard power switch, 5 sensor touch buttons Functions : contrast, brightness, sharpness, vertical and horizontal picture, phase, pixelclock, 2 user, color presettings color temperature, 18 languages, OSD (position, time), input, reset, information
<b>Extra</b>	Special Modes : CAD/CAM mode/ Animation mode/ Darkroom mode/ DualView/Low Blue Light/ Flicker Free Security : Kensington Lock Mounting : VESA Hight adjustment range / Pivot : 130 mm / 90° Pivot Swivel : -45°/+45° left/right Tilt : -5° / +20°
<b>Energy</b>	Power supply : internal Voltage for operation : 90 ~ 264 VAC / 47 ~ 63 Hz Power consumption (base on energy star) : 32 W (Sleep Mode) : 0.5 W
<b>Certification</b>	Safety : CE Ergonomic : TUV Bauart, TCO 6.0
<b>Environmental</b>	Operating : + 5 ~ +40°C ; 20 ~ 90% air humidity Storage : -20 ~ +60°C ; 10 ~ 90% air humidity
<b>Characteristic</b>	Weight net. : 6,9 kg Housing color : black Dimension with stand / w/o stand (H x W x D) : 547,32 x 641 x 239,65 mm / 379,55 x 641 x 56,58 mm Accessories : Power-, HDMI-, mini DP to DP, USB- cable, Shortguide, CD manual Warranty term: 3 years on-site exchange

